Energy Market Data Specification

Supply Number Format

Version: 21.0 Effective Date: N/A

Change History

Version Number	Implementation Date	Reason for Change
1.0	N/A	Added to REC Data Specification as part of R0012
2.0	TBD	R0083

1. The Supply Number printed on Consumers' bills and statements shall, subject to Paragraph 3, or any direction from the Authority, conform to the following requirements:

   a. it shall be printed in an appropriate and reasonable size and colour on the part of the bill or statement to be retained by the Consumer to ensure easy recognition by the Consumer; notwithstanding that, where more than two Supply Numbers are applicable to that Consumer's bill or statement, the position may be varied in accordance with Paragraph 3;

   b. the Distribution Business Id, Unique Reference and Check Digit Data Items shall be represented on a separate line to the Domestic Premises Indicator, Profile Class Id, ~~Meter Timeswitch Code~~ Market Segment Indicator, Standard Settlement Configuration Id and ~~Line Loss Factor Class~~ DUoS Tariff Id Data Items;

   c. the Distribution Business Id, Unique Reference and Check Digit Data Items shall be below the Domestic Premises Indicator, Profile Class Id, Market Segment Indicator, Standard Settlement Configuration Id and DUoS Tariff Id Data Items~~Profile Class Id, Meter Timeswitch Code and Line Loss Factor Class Id Data Items~~;

   d. both lines shall be preceded by a single capital S, making full use of the space available; and


   e. each Data Item ~~containing more than one digit~~ shall be presented in a separate block. For the Domestic Premises Indicator, Profile Class Id, Market Segment Indicator, Standard Settlement Configuration Id and DUoS Tariff Id ~~Profile Class Id, Meter Timeswitch Code and Line Loss Factor Class Id~~ Data Items, when printing these values in a Supply Number, full physical length of these data items will be used. This will require the use of leading zeroes for any value whose length is less than total length for that data item defined in the Data Specification.


   ~~e.~~ each Data Item shall be presented with zeros where that Data Item is not applicable.

2. Each Electricity Supplier shall comply with the requirements of Paragraph 1 by printing the Supply Number on Consumers' bills and statements in the format illustrated in the examples below (excluding annotations):


Example a) Supply Number with leading zero in Profile Class Id only:


Commented [HT1]: Housekeeping change

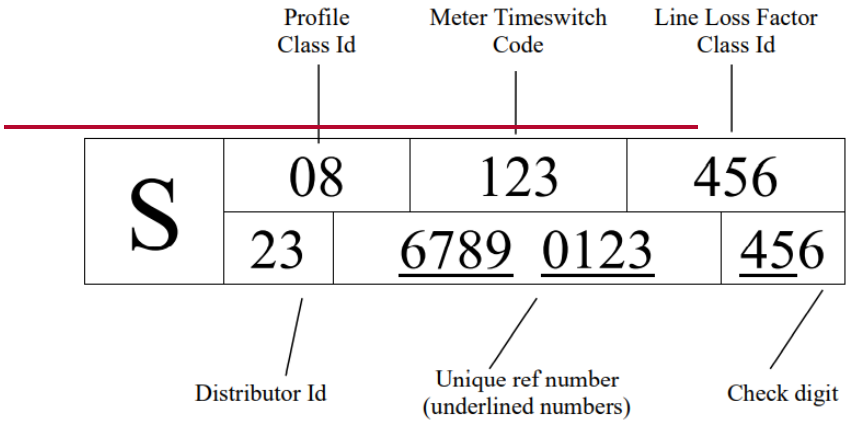

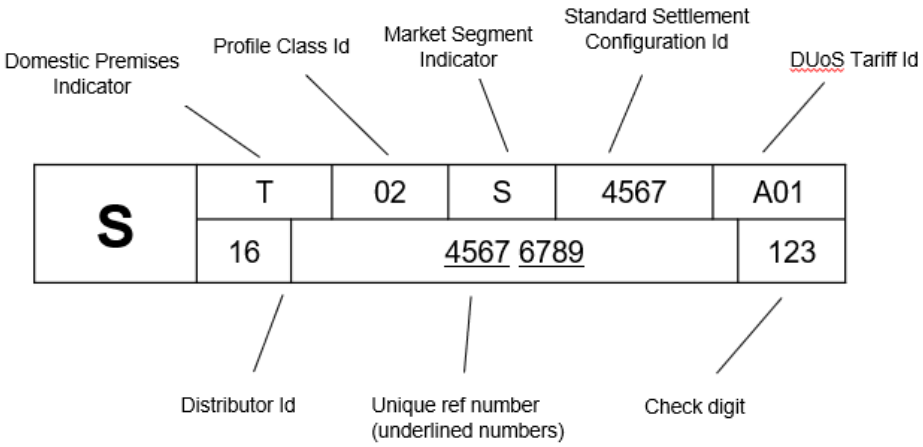

Example b) Supply Number with leading zeroes in Profile Class Id~~,~~ and Standard Settlement Configuration Id ~~Meter Timeswitch Class and Line Loss Factor Class Id~~:

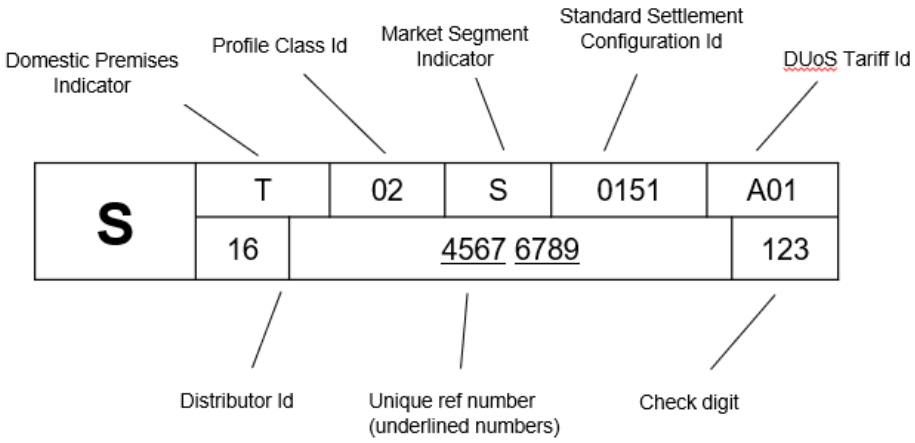

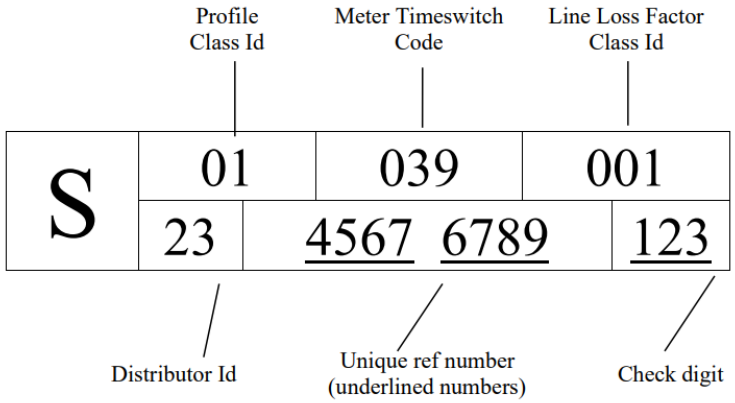

3. Where more than two Supply Numbers need to be presented on a Consumer's bill or statement, these may, at the Electricity Supplier's discretion, be printed on the reverse or on a separate page in the format set out in this Schedule.

Commented [HT2]: Housekeeping change

4. Each Electricity Supplier need not comply with the requirements of Paragraphs 2 and 3 in any case or class of cases in which the Electricity Supplier has obtained the prior approval of the Authority to the alternative format in which the Supply Number is to be represented.

Commented [HT3]: Housekeeping change